



FIELDMASTER
• PREMIUM FARM EQUIPMENT •

Catalogue 2023/24



CONTENTS

Fieldmaster Mowers

Rotary Slashers/Brush Cutters:

Sabre (18 - 40HP)	3
Sabre Hire Spec (20 - 50HP)	3
M-Series (35 - 80HP)	3
HD Series (60 - 100HP)	3

Brush Cutters/Toppers:

Jumbo (80 - 250HP)	4
GMT Gear Drive Pasture Topper	4
TM Twin Belt Drive Pasture Toppers	4
GMM Gearmower 3n1 Multicut	5
GMM HD	6
PM Parks & PMM Minipark	6

Vineyard & Orchard Mowers:

GMR Series - Rear Discharge	7
GML Series - 2-in-1 Mulcher/Mower	7
GMS Series - Side Discharge	7
MX Single Rotor Vineyard Mower	8
Mower Specifications	10-11

Fieldmaster Post Drivers

Fencer	12
Farmer	12
Forté	12
Hydrasideshift Base	13
Hydraulic Rockspike Extractor	13

Fieldmaster Attachments

Cultivation:

MF Disc Ploughs	14
Springtine Cultivator	14
Jumbo Buster Rippers	14
Ezy-Bore 40 Post Hole Borer - Cat. I	15
Ezy-Bore 80 HD Post Hole Borer - Cat. I & II	15

Fieldmaster Cosmo

Cosmo Drum Mulchers/Finishing:

SGM Finishing Mower	16
TFLS Series	16
TSFM-M Series	17
TSFM-H Series	17
TBPF Series	18

Cosmo Rotary Hoes:

TBUL Series	19
TBUM Series	19
TBUH Series	20
TBVH Series	20

Fieldmaster Glaber

VC-40 PTO Driven Woodchipper	21
VC-60R PTO Driven Woodchipper	21
SBX Box Scrapers / Blade	21
ATV Tow Flail Drum-Mulcher	21
Grader Blades	22
Pasture Harrows	22
Land Plane	22

Warranty

Warranty Policy	23
-----------------	----

MOWERS • Rotary Slashers/ Brushcutters

Sabre (18-40HP) / Sabre Hire Spec (20-50HP)



Sabre (18-40HP)

- Floating top link
- Tough 5mm deck
- PTO driveshaft
- Pin Torque Driveshaft included with SABRE1500
- 1 year warranty
- 18-40 hp compact tractors; Cat I
- Adjustable skids
- Offsettable linkage
- Fitted with stepped slasher flail
- Folded steel plate decks with integral double panels in stress zones - for a rigid chassis that takes the knocks
- Clean, obstruction-free body lines for minimal grass build-up

SABRE1200	Sabre Rotary Slasher 1.2m wide, 2 Flails	
SABRE1500	Sabre Rotary Slasher 1.5m wide, 2 Flails	
4BL	Flail Assembly Sabre 1200/1500 4BL Fitted	
RK	Sabre 1200/1500 Full Width Rear Roller Fitted	
HSKID	TM/GM Hot Skid Option (1x Pair)	
FC	Friction Clutch to suit Sabre 1200/1500 Fitted	
A4061007/PTL	Pin Clutch (Sabre 1200)	
GFS	Sabre 1200/1500 Grass Flow/Spreader Vane Fitted	
GTBL	Gold Tip Flail Assembly Sabre 1200/1500 2 or 4 Blade Fitted	
RSS/RSC	Sabre 1200/1500 Front or Rear Safety Skirt or Chain	



Sabre Hire Spec (20-50HP)

- Specifically designed for the hire industry
- Pin Torque Limiter Driveshaft Included
- Suits Tractors 20-50HP
- Fitted with 2x stepped slasher flail
- Adjustable Skids
- Tough 5mm Deck
- Hire Warranty Policy Applies
- Folding Headstock

SABREHS1500	Sabre Rotary Slasher Hire Spec 1.5m wide, 2 Flails	
4BL/1500FTD	Flail Assembly Sabre 1500 4BL Fitted	
RK/1500	Sabre 1500 Full Width Rear Roller Fitted	
GFS/1500	Sabre 1500 Grass Flow/Spreader Vane Fitted	
GTBL/1500FTD	Gold Tip Flail Assembly Sabre 1500 2 or 4 Blade Fitted	
RSS/SABRE1500	Sabre 1500 Front or Rear Safety Skirt	

M-Series (35-80HP)



**NEW ZEALAND
MADE**

M60	1.5m (60") wide, 2 flails	
4BL/M60FTD	Flail Assembly M60 4BL Fitted	
M70	1.8m (70") wide, 2 flails	
4BL/M70FTD	Flail Assembly M70 4BL Fitted	
RK/M60/M70	Full width Rear Roller kit Fitted	
FC/M60/70	Friction clutch Fitted	
GFS/M60/70	Grass Flow/Spreader Vane Fitted	
GTBL/M60FTD/M70FTD	Gold Tip flails fitted (2 or 4 blade)	
RSS/M60/M70	Front or Rear Safety Skirt	

- Floating top link
- Tough 6mm deck
- PTO driveshaft
- 1 year warranty
- Medium weight, 35-80HP tractors, Cat I & II
- Slasher/topper/mower
- Fitted with stepped slasher flail
- Adjustable skids and offsettable linkage
- Folded steel plate decks with integral double panels in stress zones - for a rigid chassis that takes the knocks
- Clean, obstruction-free body lines for minimal grass build-up

HD Series (60-100HP)



HD60	1.5m (60") Slasher, 2 axe flails	
HD70	1.8m (70") Slasher, 2 axe flails	
4BL/HD60FTD/HD70FTD	HD60/HD70 4BL & Multicut Mulching System Upgrade	
MRK/HD60/70	Full width Mega Rear Roller Kit	
FC/HD60/70	Friction Clutch to suit HD60/70 Fitted	
2009/1200	Cam Clutch integrated PTO (1300Nm)	
ORC/HD	Over run clutch fitted to Drive Shaft	
RSS/HD60/HD70	H.D.Rear safety chain skirt	

- 60-100HP tractors; Cat II
- Adjustable skids
- Floating top link
- Stepped axe flails
- Heavy duty laminated twin 6mm deck
- PTO driveshaft
- Front chain guard
- Monocoque chassis construction
- For cutting up to 50mm (2") scrub
- 1 year warranty

MOWERS • Brushcutters/ Pasture Toppers

Jumbo (80-250HP)



JUMBO	1.8m (72") Slasher/Brushcutter	
MK/JUMBO	Jumbo Mulching Kit Fitted with Chain Chokes	
FC/JUMBO	Friction Clutch to suit Jumbo	
OC/JUMBO	Overrun Clutch for Jumbo	
3009/1200	Cam Clutch integrated PTO (2600Nm)	
FSC/JUMBO	Front Safety Chain Skirt Fitted to suit Jumbo	
RSC/JUMBO	Rear Safety Chain Skirt Fitted to suit Jumbo	
AFK/JUMBO	10mm stepped axe flail in lieu of straight axe flail	

- 80-250HP tractors; Cat II
- 4 x 16mm HD straight axe flail
- HD circular 16mm flail plate
- HD PTO driveshaft
- 10mm plate deck
- 1000rpm gearbox
- Heavy gauge linkage and deck fabrications with integral bracing and double panels provide a rugged and robust platform for scrub slashing
- Extra high skids and extended length gearbox provides 'throat clearance' for large diameter mulching
- Super Ag Series gearboxes with upsized (1-3/4") 20 spline input shafts are driven through 8 series driveshaft
- Jumbo blades are flame-cut and precision-milled from Bisalloy 400 High Strength plate for long lifespan in continuously heavy conditions
- Front safety chain skirt fitted

**NEW ZEALAND
MADE**

GMT Gear Drive Pasture Topper



GMT180	1.8m GMT Gearmower 2 Rotor Topper	
GMT200	2.0m GMT Gearmower 2 Rotor Topper (30-80HP)	
GMT230	2.3m GMT Gearmower 2 Rotor Topper (40-80HP)	
GMT270	2.7m GMT Gearmower 2 Rotor Topper (50-80HP)	
GMT300	3.0m GMT Gearmower 3 Rotor Topper (1000rpm) (70-130HP)	
GMT330	3.3m GMT Gearmower 3 Rotor Topper (1000rpm) (70-130HP)	
RK/GM180 - 330	Bolt on Full Width Rear Roller Kit (125mm Dia) (180 - 330)	
ASD/GM	GM HD Anti Scalp Dome (Fitted Per Rotor)	
FRSC/GM	GM Front Safety Chain Set	
2009/1200	Cam Clutch integrated PTO (1300Nm)	

A rugged All Gear Drive pasture topper

- Fitted with Friction Clutch
- Fitted with Gold-Tip Blades
- Front PVC safety skirt
- High-clearance adjustable skids
- Floating top link
- Cat II linkage
- 1 year warranty
- PTO Driveshaft

TM Twin Belt Drive Pasture Toppers



TM210	2.1m Twin Belt Drive 3 spindle Topper - 5000 Series	
TM240	2.4m Twin Belt Drive 3 spindle Topper - 5000 Series	
TM270	2.7m Twin Belt Drive 4 spindle Topper - 5000 Series	
TM300	3.0m Twin Belt Drive 4 spindle Topper - 5000 Series	
HSKID	TM/GM Hot Skid Option (1x Pair)	
RK/TM	TM Bolt on Full Width Rear Roller Kit (125mm Dia)	
ASD/TM	TM Front Anti Scalp Skids or Anti Scalp Domes (each)	
RSS/TM	TM Rear Safety Skirts	
FC/TM	Friction Clutch to suit TM210-300	

A high-clearance, hi-speed, twin-belt driven pasture topper

- Fitted with Gold-Tip Blades
- High-clearance adjustable skids
- Open/wide grass flow vanes for lush pasture
- Front rubber safety skirt
- Floating top link
- PTO driveshaft
- Suits tractors 40-120HP
- Cat. II linkage
- 2 year warranty

MOWERS • Multi-Cut Rotary Mulchers

**2 YEAR
WARRANTY**

GMM Gearmower 3n1 Multicut Mulcher/Topper/Slasher

The GMM Gearmower - the preferred choice for mulching work:

- Lower power requirement means less diesel consumption
- Simple transmission system with lower cost parts means reduced maintenance costs
- The transmission system delivers full PTO power to the blades which means no slippage
- Fitted standard with triple stack mulching blades and front safety chains
- Removable rear mulch retaining panels
- Easily changed over to be used as a H.D. pasture topper or slasher by changing the blades
- European gearboxes, driveline and cam clutch integrated PTO (2500 - 3000Nm)
- For Tractors with 30HP-90HP
- Twin 5mm laminated construction with full width underbody bracing and overdeck gussets - for strength where it's needed

EURO/GMM160	1.6m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM180	1.8m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM200	1.8m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM230	2.3m Euro GMM Gearmower 2 Rotor 3n1 Multicut	
EURO/GMM270	2.7m Euro GMM Gearmower 2 Rotor 3n1 Multicut	

- Imported gearboxes, driveline and cam clutch integrated PTO (2500-3000Nm)
- For tractors with 70-130HP

GMM270/3RT	2.7m Euro GMM Gearmower 3 Rotor 3n1 Multicut	
GMM300	3.0m Euro GMM Gearmower 3 Rotor 3n1 Multicut (1000rpm)	
GMM330	3.3m Euro GMM Gearmower 3 Rotor 3n1 Multicut (1000rpm)	

OPTIONS AND EXTRAS

GTK	Pasture Topper Upgrade to Gold Tip Flail Set (160 - 270)	
GTK/300/330	Pasture Topper Upgrade to Gold Tip Flail Set (300 - 330)	
AFK	Slasher Blade Upgrade to Axe Flail Set (160 - 270)	
AFK/300/330	Slasher Blade Upgrade to Axe Flail Set (300 - 330)	
RK/GM160 - 330	Bolt on Full Width Rear Roller Kit (125mm Dia) (160 - 330)	
RWK/GM	GM160 - 330 Rear Swivel Castor Wheel Kit (Pair)	
HDF	Hard Face 'Tungsten' Mulching Blade Option (Per Blade)	
FM/GM	GM Front Mount Option	
RSC/GM	Rear Safety Chain 3 Piece Set	
ASD/GM	GM HD Anti Scalp Dome (Fitted Per Rotor)	



MAIZE STUBBLE



MULCHING RUSHES



MULCHING RATSTAIL



MULCHING KIKUYU




**OPTIONAL ANTI-
SCALP DOME**



**HEAVY DUTY PUNCTURE
PROOF SOLID FILLED
CASTOR WHEELS**



**OPTIONAL BOLT ON
REAR ROLLER KIT**



Mulching flail



Gold-tip flail



Slasher blade

**NEW ZEALAND
MADE**

MOWERS • Multi-Cut Rotary Heavy-duty Mulchers & Park Mowers

GMM HD Multi Cut (1000RPM)



The GMM HD Multipurpose machine is built with our proven GMM deck, with the added strength of an extra heavy-duty drive line.

- For big tractors with 120-180HP
- Fitted with triple stack mulching blades
- Front safety chain
- Removable rear mulch panels
- Easily changed over to be used as a H.D pasture topper, or a slasher, by changing blades (purchased separately)

GMMHD230	2.3m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GMMHD270	2.7m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GMMHD300	3.0m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GMMHD330	3.3m GMMHD Gearmower 3 Rotor 3n1 Multicut	
GTK	Pasture Topper Upgrade to Gold Tip Flail Set (160 - 270)	
GTK/300/330	Pasture Topper Upgrade to Gold Tip Flail Set (300 - 330)	
AFK	Slasher Blade Upgrade to Axe Flail Set (160 - 270)	
AFK/300/330	Slasher Blade Upgrade to Axe Flail Set (300 - 330)	
RK/GM160 - 330	Bolt on Full Width Rear Roller Kit (125mm Dia) (160 - 330)	
RWK/GM	GM160 - 330 Rear Swivel Castor Wheel Kit (Pair)	
HDF	Hard Face 'Tungsten' Mulching Blade Option (Per Blade)	
FM/GM	GM Front Mount Option	
RSC/GM	Rear Safety Chain 3 Piece Set	
ASD/GM	GM HD Anti Scalp Dome (Fitted Per Rotor)	

- Fitted with a cam clutch integrated PTO 2600Nm
- Twin 5mm laminated construction with full width underbody bracing and overdeck gussets - for strength where it's needed
- Centre gearbox rated to 180hp transfers power through Centaflex industrial-drive couplings - a low maintenance drivetrain to handle serious PTO power levels
- 2 year warranty

**NEW ZEALAND
MADE**

PM Parks



Single Roller Twin Roller

		Single Roller	Twin Roller
PM210	(7') 2.1m Parks Roller Mower		
PM240	(8') 2.4m Parks Roller Mower		
PM270	(9') 2.7m Parks Roller Mower (4 spindle)		
PM300	(10') 3.0m Parks Roller Mower (4 spindles)		
FC/PM	Friction clutch		

A Heavy Duty Twin-Belt Drive 5000 Series Rotary Mower

- Rear roller or optional twin rollers
- Twin-belt drive ensures maximum power
- Fitted with Gold Tip Blades
- Rear rubber safety skirt
- Suits tractors from 40-120HP
- Twin-belt drive to all spindles
- 67% speed-increaser pulley ratio
- Deep groove section belts to ensure maximum power delivery to blades in all conditions, plus extended belt life
- A triangulated 5mm deck for strength where needed, without adding weight
- 2 year warranty
- Height Adjustable skids

PMM Minipark Mower



PM150MS	Mini Parkmower 1.5m Rear Roller Only	
PM150MT	Mini Parkmower 1.5m Twin Rollers	
PM180MS	Mini Parkmower 1.8m Rear Roller Only	
PM180MT	Mini Parkmower 1.8m Twin Rollers	
FC/PM	Friction Clutch to suit TM210-300	

A low-profile, commercial-grade, precision-cutting, single-belt-drive Roller Mower

- Rear and/or front roller
- Fitted with "Gold Tip" Blades
- 3 HD spindles
- Screw adjustable cut-height settings
- Full under body grass flow vanes for even grass discharge
- Floating top link
- PTO driveshaft
- Weight matched for smaller horsepower, compact tractors
- Suits compact tractors 30-50HP
- Low profile with single or twin roller options
- Maintain a beautiful rolled lawn finish - full width rollers will 'stripe finish' lawns
- 2 year warranty

MOWERS • Specialised Vineyard/Orchard Mowers

GMR Series - Rear Discharge

2 YEAR
WARRANTY



Orchard/Vineyard Mower:

- Side skids
- Rear mega-roller
- Stepped axle flails for rear-discharge mowing
- European gearboxes and driveline
- Cam clutch
- Front rubber safety skirt

	STANDARD	Fitted with rear wheels in lieu of rear roller
EURO/GMR140		
EURO/GMR160		
EURO/GMR180		
EURO/GMR200		
EURO/GMR230		
EURO/GMR270		
EURO/GMR270/3R		
EURO/GMR300		
EURO/GMR330		

NEW ZEALAND
MADE

GML Series 2-in-1 Mulcher/Mower

2 YEAR
WARRANTY



Multi-purpose Mulcher/Mower:

- Rear mega-roller
- Twin front stubbie rollers
- Triple-stack mulching blades
- Removable mulching vane
- Removable side plates
- European gearboxes and driveline
- Cam clutch
- Front rubber safety skirt

	STANDARD	OPTION A: Fitted with front wheels in lieu of twin front rollers	OPTION B: Fitted with 4 x wheels in lieu of all rollers
EURO GML 140			
EURO GML 160			
EURO GML 180			
EURO GML 200			
EURO GML 230			
EURO GML 270			
EURO GML 300			
EURO GML 330			

RSC/GML/CRNLH	GML Rear LH Corner Safety Chain Skirt	
RSC/GML/CRNRH	GML Rear RH Corner Safety Chain Skirt	

GMS Series - Side Discharge



Orchard / Vineyard Mower:

- Rear mega roller
- Twin front stubbie rollers
- Stepped axle flails for side-discharge mowing
- European gearboxes and driveline
- Cam clutch
- Front rubber safety skirt
- 2 year warranty


	STANDARD	OPTION A: Fitted with front wheels in lieu of twin front rollers	OPTION B: Fitted with 4 x wheels in lieu of all rollers
EURO GMS 140			
EURO GMS 160			
EURO GMS 180			
EURO GMS 200			
EURO GMS 230			
EURO GMS 270			
ADD: Mulching kit - mulch vane, blades, bolts, sideplates, (GMS 140 / 160 / 180 / 200 / 230 / 270)			
ADD: 1 x pair side blanking plates			

GM SERIES VINEYARD MOWERS

- With an extensive model range in 7 widths, and side or rear discharge versions, the GM Series mowers meet most orchard/ mowing requirements.
- A specially designed compact twin and 3-rotor format, with synchronised blade overlap allows for an excellent turning circle and maneuverability, plus improved contour following in restricted areas.
- 100 mm wide kinked axe flails provide substantial impact and cutting power to handle prunings, while still giving the grass a clean, even finish - throwing to the side or rear.
- 'Triple-stack' mulcher blades on the GML have a central 100 x 10 upper and lower knife tips to provide finely chopped mulch material in all orchard/vineyard row conditions. These blades are double-edged and can be rotated for even wear and economical cutting life.

OPTIONS & EXTRAS:

ASD/GM	HD Antiscalp saucers full set fitted (per rotor)	
GTK	Spare pasture topper flail set c/w 'Gold Tips' (140-270)	
GTK/300/330	Spare pasture topper flail set c/w 'Gold Tips' (300/330)	
HDF	Hardfaced 'Tungsten' upgrade to mulch blades (per blade)	
FM/GM	Front mount option	
4WAY	4-way gearbox (160-270)	

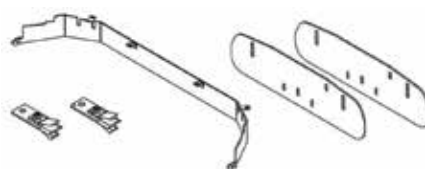

VINEYARD/ORCHARD MULCHING KIT

MX Single Rotor Vineyard Mower



MX40
with rear roller



MX60
on skids

		CUT	
MX40	(3') Vineyard mower c/w skids	1.0m	
MX50	(4') Vineyard mower c/w skids	1.2m	
MX60	(5') Vineyard mower c/w skids	1.5m	
MX70	(6') Vineyard mower c/w skids	1.8m	
RK/MX	MX Bolt on Rear Mega Roller Kit (220mm Dia)		
FWK/MX	MX Series Front or Rear Wheel Kit (PAIR)		
SDS/MX	Side Discharge Skid (LH) in lieu of std skid		
MK/MX	MX40/50 Mulch Kit fitted (Incl blades & mulch vane)		
FC/MX	MX Series Friction Clutch Fitted		

This heavy duty specialised vineyard mower compliments the GM Vineyard/Orchard series. MX Series vineyard mowers meet the market with a rugged, yet simple, 2-flail single-rotor machine for narrow rows - at a great value price.

- Extra H.D commercial grade deck
- H.D headstock
- Adjustable skids with H.D wear shoes
- Fitted with stepped axe flails
- Rear discharge and floating top link
- Front and rear deflector guard (MX60)

**NEW ZEALAND
MADE**



Fieldmaster Evolution – 1955 to Now



MOWERS • Specifications

Model	Cutting width (approx)	Overall width (approx)	Cutting range	Overall height	Overall length	Weight	Tractor HP range	Cutter heads	Cutting tips	Blade type	Linkage Pins	PTO revs
Sabre 1200	1050	1220	10-85mm	750	1290	150	18-40hp	1	2	Stepped Axe Flail	Cat 1	540RPM
Sabre 1500	1380	1525	10-85mm	750	1580	210	18-40hp	1	2	Stepped Axe Flail	Cat 1	540RPM
M-Sixty	1488	1690	10-85mm	850	1620	350	35-80hp	1	2	Stepped Axe Flail	Cat 1 & 2	540RPM
M-Seventy	1720	1950	10-95mm	880	1977	480	35-80hp	1	2	Stepped Axe Flail	Cat 1 & 2	540RPM
H.D.Sixty	1400	1707	20-120mm	1160	1820	550	60-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM
H.D.Seventy	1786	1950	20-120mm	1160	2090	650	60-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM
Jumbo	1720	2000	30-120mm	1580	2100	850	80-250hp	1	2	Flat Flail 16mm	Cat 2	540RPM
GMT 200	1980	2142	20-120mm	1050	1530	700	30-80hp	2	4	Gold Tip Blades	Cat 2	540RPM
GMT 230	2280	2442	20-120mm	1050	1650	750	40-80hp	2	4	Gold Tip Blades	Cat 2	540RPM
GMT 270	2680	2882	20-120mm	1050	1765	780	50-90hp	2	4	Gold Tip Blades	Cat 2	540RPM
GMT 300	2980	3142	20-120mm	1050	1530	820	70-130hp	3	6	Gold Tip Blades	Cat 2	1000RPM
TM/PM 210	2035	2240	20-120mm	1050	1575	550	40-120hp	3	6	Gold Tip Blades	Cat 2	540RPM
TM/PM 240	2345	2540	20-120mm	1050	1575	680	40-120hp	3	6	Gold Tip Blades	Cat 2	540RPM
TM/PM 270	2645	2840	20-120mm	1050	1575	720	40-120hp	3	6	Gold Tip Blades	Cat 2	540RPM
TM/PM 300	2945	3170	20-120mm	1050	1575	780	40-120hp	4	8	Gold Tip Blades	Cat 2	540RPM
Euro GMM 160	1590	1742	20-120mm	1050	1440	640	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 180	1780	1942	20-120mm	1050	1440	690	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 200	1980	2142	20-120mm	1050	1530	740	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 230	2280	2442	20-120mm	1050	1650	790	40-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
Euro GMM 270	2680	2882	20-120mm	1050	1765	820	50-90hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
GMM 300	2980	3142	20-120mm	1050	1530	880	70-130hp	3	6	Triple Stack Mulching Blades	Cat 2	1000RPM
GMM 330	3280	3365	20-120mm	1050	1530	920	70-130hp	3	6	Triple Stack Mulching Blades	Cat 2	1000RPM
GMMHD 230	2280	2448	20-120mm	1050	1650	890	120-250hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
GMMHD 270	2680	2890	20-120mm	1050	1765	920	120-250hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
GMMHD 300	2980	3142	20-120mm	1050	1530	990	120-250hp	3	6	Triple Stack Mulching Blades	Cat 2	540RPM
GMMHD 330	3280	3365	20-120mm	1050	1530	1040	120-250hp	3	6	Triple Stack Mulching Blades	Cat 2	540RPM

*Due to continuous manufacturing improvements specifications may vary

MOWERS • Specifications

Model	Cutting width (approx)	Overall width (approx)	Cutting range	Overall height	Overall length	Weight	Tractor HP range	Cutter heads	Cutting tips	Blade type	Linkage Pins	PTO revs
EURO GMR 140	1380	1542	15-100mm	950	1530	545	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 160	1580	1742	15-100mm	950	1550	650	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 180	1780	1942	15-100mm	950	1595	720	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 200	1980	2142	15-100mm	950	1635	780	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 230	2280	2442	15-100mm	950	1695	820	40-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 270	2680	2882	15-100mm	950	1810	860	50-90hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMR 300	2980	3142	15-100mm	950	1635	920	70-130hp	3	6	Stepped Axe Flail	Cat 2	1000RPM
EURO GMR 330	3280	3365	15-100mm	950	1695	950	70-130hp	3	6	Stepped Axe Flail	Cat 2	1000RPM
EURO GML 140	1380	1446	15-100mm	950	1550	545	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 160	1580	1630	15-100mm	950	1580	650	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 180	1780	1840	15-100mm	950	1620	720	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 200	1980	2040	15-100mm	950	1654	780	30-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 230	2280	2340	15-100mm	950	1720	820	40-80hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 270	2680	2765	15-100mm	950	1850	850	50-90hp	2	4	Triple Stack Mulching Blades	Cat 2	540RPM
EURO GML 300	2980	3065	15-100mm	950	1654	920	70-130hp	3	6	Triple Stack Mulching Blades	Cat 2	1000RPM
EURO GML 330	3280	3365	15-100mm	950	1720	950	70-130hp	3	6	Triple Stack Mulching Blades	Cat 2	1000RPM
EURO GMS 140	1380	1446	15-100mm	950	1550	520	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 160	1580	1610	15-100mm	950	1580	620	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 180	1780	1816	15-100mm	950	1620	690	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 200	1980	2016	15-100mm	950	1654	760	30-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 230	2280	2316	15-100mm	950	1720	790	40-80hp	2	4	Stepped Axe Flail	Cat 2	540RPM
EURO GMS 270	2680	2765	15-100mm	950	1850	840	50-90hp	2	4	Stepped Axe Flail	Cat 2	540RPM
MX 40	1037	1232	10-110mm	900	1510	380	30-80hp	1	2	Stepped Axe Flail	Cat 2	540RPM
MX 50	1247	1406	10-105mm	1000	1633	520	30-80hp	1	2	Stepped Axe Flail	Cat 2	540RPM
MX 60	1485	1707	20-120mm	1050	1695	670	50-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM
MX 70	1786	1950	20-120mm	1100	2050	750	50-100hp	1	2	Stepped Axe Flail	Cat 2	540RPM

*Due to continuous manufacturing improvements specifications may vary

POST DRIVERS • Farmer, Fencer & Forté

Farmer



**NEW ZEALAND
MADE**

- 180kg (400lb) hammer
- 4.0m mast
- 3 bank control valve (2 spare banks)
- Manual side angle
- 16 ltrs per min required

FARMER/180	Manual Post Driver	
TL/F	Farmer Hydraulic Top Link Kit	
ST/F	Farmer Hydraulic Side Angle Kit	
230kg	Hammer Upgrade - 230kg	
SN/FC	Hydraulic Side Shift (250mm) Nudge Ram Kit (suits Farmer, Fencer & Forte)	
SBV/C	Extra valve slice (per slice)	
QRC	Q.R.C. Fitted on Valve (Per Slice)	
CCV/F	Closed Circuit Valve Mod Kit (suits JD etc)	
RS/FC	Farmer Manual Super Spike Shaft (Tapered 75mm) c/w Chains & Brackets	

Fencer



BEST SELLER
For smaller dairy, beef
& sheep farmers

- 230kg (506lb) hammer
- 4.0m H.D. TRI-BEAM mast
- 4-bank valve hydraulic side angle
- Hydraulic top link
- 16 ltrs per min required

FENCER	Hydraulic Post Driver	
280kg	Hammer Upgrade - 280kg	
	Top Link Extension Bracket	
998002.04	Side Angle Extension Bracket	
SN/FC	Hydraulic Side Shift (250mm) Nudge Ram Kit (suits Farmer, Fencer & Forte)	
SBV/C	Extra valve slice (per slice)	
QRC	Q.R.C. Fitted on Valve (Per Slice)	
116006	Polypropylene Post Cap	
CCV/F	Closed Circuit Valve Mod Kit (suits JD etc)	
FENCER/HYDFLD	Hydraulic Post Driver 4.5m Hydraulic Folding Mast c/w hydraulic ram & valve	

Forté



- 320 kg (700lb) hammer
- 4.0m H.D. Beamtec mast
- H.D hydraulic side angle & top link rams
- 3-bank valve
- H.D postcap with polyethylene insert
- Side tilt and top links are upsized to 3" x 1.5" rams
- 16 ltrs per min required

FORTÉ	Hydraulic Post Driver	
SN/FC	Hydraulic Side Shift (250mm) Nudge Ram Kit (suits Farmer, Fencer & Forte)	
CCV/F	Closed Circuit Valve Mod Kit (suits JD etc)	
FORTE/HYDFLD	Hydraulic Post Driver 4.5m Hydraulic Folding Mast c/w hydraulic ram & valve	

- Starts tough from the ground up: base frame and support legs are fabricated from 125 x 75 section RHS, which gives an extra-low centre of gravity - putting the weight and strength where it's needed, for safety and gravity.
- Power through the fencing: 8:1 rope-pully configuration means the hammer falls faster on retraction of the ram, for increased impact force
- Megaflow hydraulics valving is reamed out oversize, allowing oil to move through the operating system faster and cooler, for a quick, positive response - like a big-bore exhaust!
- The tri-beam mast (standard on Fencer & Forté) designed on the triangulation concept is 110% more resistant to twisting force than standard UB section beam. Because you get strength without unnecessary weight the machine operates smoothly without top-heavy, jerking movements.

POST DRIVERS • Sideshift Bases & Rockspike

Hydrasideshift Bases



HSS300
Ultra compact 300mm
sideshift base



HSS600
Standard 600mm



HSS900
900mm sideshift
base

Easily detachable hydraulic sideshift bases for post drivers - suits most available brands.

		Side Shift	Back Shift	
HSS300	Hydrasideshift Compact Base with Dual Hitch (260mm Offset) - 300mm	300mm	-	
HSS300/4W	Hydrasideshift Compact Base- 4way Travel	300mm	250mm	
HSS600	Hydrasideshift Standard Base c/w counterbalance weight, tool holder, hose kit, dual slide frame	600mm	-	
HSS600/4W	Hydrasideshift 4Way Base. As above, but with MPS '4-way' / backshift (360°) movement (forward, rev, in, out)	600mm	250mm	
HSS600/VY	VY Vineyard Side Shift Hydraside shift compact vineyard base	600mm	-	
HSS600/VY/4W	VY 4 way base / backshift (360°) movement vineyard base	600mm	250mm	
HSS900	Hydrasideshift Standard Base c/w counterbalance weight, aluminum tool holder box, hose kit, dual slide frame	900mm	-	
HSS900/4W	Hydrasideshift 4Way Base As above, but with MPS '4-way' / backshift (360°) movement (forward, rev, in, out)	900mm	250mm	
Remember to add extra retrofit valves if fitting to existing Rammer, see below:				
SBV/C	Single bank valve kit	-	-	

Hydraulic Rockspike Extractor

**NEW ZEALAND
MADE**



The Fieldmaster Fencer and Forte post drivers can be equipped with factory-fitted rockspike kits. These kits are specifically designed for convenient operation in the toughest of ground conditions. These kits ensure effortless performance in the field when dealing with challenging ground conditions, you can request a factory-fitted rockspike that smoothly swings into position, effectively preparing the ground prior to ramming. These kits can also be fitted as an aftermarket kit however must be installed by a qualified engineer.

RSK-HYDRASPIKE	Hydraulic Rock Spike Extractor kit for Fencer & Forté models c/w extractor ram, hoses & 40mm lifting plate, extra valve (excludes Rock Spike)	
RS/90	Rock Spike 90mm c/w nylon cap	
RS/120	Rock Spike 120mm c/w nylon cap	

MF Disc Ploughs



Fieldmaster's MF Disc ploughs are easy on horse power and great for the soil because they make a finer cut and give better aeration than a conventional plough.

This is the original well-proven Massey Fergusson designed disc plough. This form of ploughing is suited to a wide range of soil types including peat and sandy country. It's ideal for ploughing crop residue and stubble back in after harvesting.

- Large 66cm heavy duty discs equally spaced at 53cm will work to a depth of 25cm

	No Discs	Length	Width	Weight	
MDP 2	2	1155mm	660mm	310kg	
MDP 3	3	2130mm	660mm	400kg	
MDP 4	4	2520mm	1320mm	470kg	

Springtine Cultivator



		Number of Tines	
ST1500	1.5m Cultivator c/w Roller	16	
ST2400	2.4m Cultivator c/w Roller	23	
ST3000	3.0m Cultivator c/w Roller	30	
ST3600	3.6m Cultivator c/w Roller	35	
ST4200	4.2m Cultivator c/w Roller	41	

The Springtine Cultivator is a very versatile tool! It's ideal for fast and efficient land levelling, seed preparation, stubble cleaning and weed control. The unique design allows you to do high-speed passes at an optimum working depth of 12cm.

- Suitable for tractors 16HP and higher
- Heavy-duty 12mm spring tines
- A HD RHS 4-row frame
- Curved 'L' blades (1.0M = 20/1.5M = 28)
- Cultivator frame is blasted and oven-baked powder coated for a long lifespan
- Height adjustable full-width rear crumbler roller
- Heavy duty 18" diameter rotor
- Built in-house - please order as needed

Jumbo Buster Ripper



	Width	HP Rqd	Weight	Number Tines	
GOCP 5	1600	50 - 70	310	5	
GOCP 7	2100	60 - 80	390	7	
GOCP 9	2500	80 - 100	460	9	
GOCP 11	3000	100 - 130	530	11	
GOCP 13	3000	100 - 130	550	13	

Fieldmaster's Chisel Ploughs or Deep Rippers are invaluable for improving poor drainage, compacted soil and hard pans (under the topsoil).

- Working depth of 20-45cm
- Tine spacing 250mm
- 3-13 tine options

Uses include:

Soil Aeration: Breaks up the top soil into big random clods which allows air into the soil and helps with the drying out of puggy areas. Also speeds up the decomposing of stubble and releases the nutrients better. **Pan Breaking:** Breaking up the lower hard pan allows roots to penetrate deeper to moisture in dry weather and improves drainage in the wet.

Ezy-Bore 40 Post Hole Borer - Cat. I



PHD40	EZY-BORE 40 Post Hole Borer	
PHD40/AUG100	Auger 100mm (4") for PHD40 c/w Tips	
PHD40/AUG150	Auger 150mm (6") for PHD40 c/w Tips	
PHD40/AUG225	Auger 225mm (9") for PHD40 c/w Tips	
PHD40/AUG300	Auger 300mm (12") for PHD40 c/w Tips	

- 3-point linkage mounted borer
- PTO driveshaft Cat I
- Shear bolt safety cut-out on driveshaft and lifting lug
- Suits tractors 18-40hp
- Augers are 900mm long with replaceable tips.

Ezy-Bore 80 HD Post Hole Borer



PHD80	EZY-BORE 80 Post Hole Borer	
AUG300E	Auger 300mm (12") c/w Tips	
AUG350E	Auger 350mm (14") c/w Tips	
AUG400E	Auger 400mm (16") c/w Tips	
AUG500E	Auger 500mm (20") c/w Tips	
AUG600E	Auger 600mm (4") c/w Tips	

- 3-point linkage mounted borer
- Cat II only
- Shear bolt safety cut-out on driveshaft and lifting lug
- Suits tractors 40-80HP
- Augers are 1.2m long with replaceable tips
- Extra length available on request

SGM Finishing Mower



The Cosmo SGM finishing mowers are designed to groom lawn and grass areas professionally. Three (3) suction type blades turn at a high tip speed giving tender grass a fine sharp cut. Four (4) solid swivel wheels allow the mower to follow the contour of the ground resulting in a precise and level cut in undulating conditions. Cutting height can be adjusted by adding or removing spacers on the caster wheel shafts and an anti-scalping roller is standard. Attached to the back of a 25-60hp tractor, the SGM finishing mower works efficiently to mow and maintain areas like private lawns, parks, hospital grounds, schools and golf courses.

Code	TSGM150	TSGM180	TSGM210
Description	(1.5m/5') Finishing Mower	(1.8m/6') Finishing Mower	(2.1m/7') Finishing Mower
Side Transmission	Belt drive		
Belts	Two (2)		
Gearbox	60HP 540RPM		
PTO Shaft	Series 4		
Wheels	Solid, 360 degree rotation		
Finish	Powder Coated		
Type of blade	6mm, high lift, stepped		
No. of blades	Three (3)		
Tower	Fixed/bolt on, centre mount		
Linkage	Cat 1		
Overall Width (mm)	1620	1920	2220
Working Width (mm)	1520	1820	2120
Cutting Height (mm)	20-110		
Tractor Range (HP)	25-60	35-60	45-60
Weight (kg)	225	250	300
Price			

FLS Series Mulcher



The COSMO FLS Series Mulchers are a light duty flail mower designed for compact and sub-compact tractors, 15 to 35HP. A free wheel clutch has been incorporated into the gearbox. The gearbox produces a high rotor speed that results in a finer finish on large areas of lawn, parklands or smallholding farms.

Code	TFLS105	TFLS-R125	TFLS145
Description	Bully FLS105 Mulcher	Bully FLS125 Mulcher	Bully FLS145 Mulcher
Side Transmission	Belt drive		
Belts	SPA	XPA	SPA
Gearbox	35HP, 540rpm with free wheel clutch		
PTO Shaft	Series 4		
Skids	Adjustable, three (3) positions		
Rear roller	Ø102mm, height adjustable		
Finish	Powder coated		
Rotor swing dia. (mm)	280		
Rotor diameter (mm)	76		
Rotor speed (rpm)	3000	2600	3000
Type of blade	Hammer 'Y' blades on request		
No. of blades	18 36	20 40	24 48
Tower position/offset	Fixed/bolt on with two (2) mounting positions, 100mm apart		
Linkage	Category 1		
Guarding	CE compliant		
Overall width (mm)	1230	1430	1630
Working width (mm)	1050	1250	1450
Cutting height (mm)	from 15mm to 45mm		
Tractor range (HP)	15-35	20-35	25-35
Weight (kg)	158	170	182
Price			

SFM-M/SFM-H Series Mulcher



The European designed COSMO SFM-M (minimal offset) Series Mulchers have a fixed, bolt on tower with three (3) mounting positions. COSMO SFM-H Series Mulchers come with a tower that hydraulically side shifts. The rear of the deck has a series of height adjustable mulching rakes that hold large prunings (up to Ø 50mm) in the cutting chamber for maximum mulching. This results in a high quality cut finish in vineyards, orchards and pastures. The COSMO SFM Series Mulcher is specifically designed for tractors 30 to 70HP.

Code	TSFM130M	TSFM145M	TSFM160H	TSFM175H	TSFM205H	TSFM220H
Description	SFM130-M Mulcher	SFM145-M Mulcher	SFM160-H Mulcher	SFM175-H Mulcher	SFM205-H Mulcher	SFM220-H Mulcher
Side transmission	Belt drive					
Belts	Three (3) BX type	Four (4) BX type				
Gearbox	70hp, 540rpm with free wheel clutch					
PTO shaft/clutch	Series 4			Series 6		
Skids	Adjustable, three (3) positions					
Rear roller	Ø 140mm, height adjustable					
Finish	Powder coated					
Rotor swing dia. (mm)	380					
Rotor diameter (mm)	160					
Rotor speed (rpm)	2083					
Type of blade	Hammer					
No. of hammers	16	18	20	22	26	28
Tower position/offset	Fixed/bolt on tower with three (3) mounting positions, 150mm apart		Hydraulic side shift (300mm)			
Linkage	Category 1		Category 1 and 2 (bushes for category 2)			
Guarding	CE compliant					
Overall width (mm)	1450	1620	1770	1920	2220	2370
Working width (mm)	1300	1450	1600	1750	2050	2200
Cutting height (mm)	from 20mm - 105mm					
Tractor range (HP)	30 - 70	35 - 70	40 - 70	50 - 70	55 - 70	60 - 70
Weight (kg)	366	388	420	440	485	510
Price						

Parts

17295 SFM Series hammer (each)

Optional

17228 SFM Series Y blade (each)

17229 SFM Series Y blade spacer (each)

BPF Series Mulcher



The European designed COSMO BPF Series Mulchers are designed for tractors 60 to 100HP and have a tower that hydraulically side shifts. Like other COSMO Mulchers, a series of height adjustable mulching rakes hold larger prunings (up to Ø 70mm) in the cutting chamber for mulching in vineyards and orchards. Additionally, the rear of the COSMO BPF Series Mulcher deck can be opened to top pasture or when the operator needs to clear the chamber. This function is beneficial when cutting high volumes of material allowing it to be discharged efficiently, without sacrificing speed. Complete with a double skinned deck, side shift, a height adjustable rear roller and hammer blades, this mulcher will produce a high quality finish.

Code	TBPF160H	TBPF180H	TBPF200H	TBPF225H	TBPF250H
Description	BPF160 Mulcher	BPF180 Mulcher	BPF200 Mulcher	BPF225 Mulcher	BPF250 Mulcher
Side transmission	Belt drive				
Belts	Four (4) XPB type				Five (5) XPB type
Gearbox	100hp, 540rpm with free wheel clutch				
PTO shaft/clutch	Series 6				
Skids	Adjustable, two (2) positions				
Rear roller	Ø 165mm, height adjustable				
Finish	Powder coated				
Rotor swing dia. (mm)	410				
Rotor diameter (mm)	170				
Rotor speed (rpm)	2146				
Type of blade	Hammer				
No. of hammers	16	16	20	20	24
Tower position/offset	Hyd. side shift (400mm)	Hyd. side shift (337mm)	Hyd. side shift (437mm)	Hyd. side shift (467mm)	
Linkage	Category 2				
Guarding	CE compliant				
Overall width (mm)	1800	2000	2200	2450	2700
Working width (mm)	1580	1780	1980	2230	2480
Cutting height (mm)	20 - 75				
Tractor range (HP)	60 - 100		70 - 100	80 - 100	85 - 100
Weight (kg)	640	680	735	800	865
Price					

Parts

17067 BPF Series hammer (each)

UL/UM Series Rotary Hoe



The European designed, COSMO UL Series Rotary Hoes are gear driven implements for compact and sub-compact tractors up to 40HP (max.). Engineered to till soil in nurseries, vineyards, orchards and hobby farms, they are ideal for owner operators. The rotor features six (6) C shaped, heat treated blades (per flange) in a speed configuration. The speed configuration, a design where the blades are slightly staggered from flange to flange, reduces the horsepower required to produce a fine finish in a variety of soil conditions.



The European designed COSMO UM Series Rotary Hoes are a single speed, side gear driven implement specifically for tractors in the 35 to 50HP range. Engineered to include multiple features and accessories traditionally found in much larger rotary hoes, the UM Series is suitable for use in nurseries, vineyards and orchards. The rotor features six (6) C shaped, heat treated blades (per flange) in a speed configuration. The speed configuration, a design where the blades are slightly staggered from flange to flange, reduces the horsepower required to produce a fine finish in a variety of soil conditions.

Code	TBUL36	TBUL48	TBUM60	TBUM72
Description	UL36 Rotary Hoe	UL48 Rotary Hoe	UM60 Rotary Hoe	UM72 Rotary Hoe
Side transmission	Gear drive			
Gearbox	40HP, 540rpm, single speed		50HP, 540rpm, single speed	
PTO shaft/clutch	Series 4 with 150mm (6”) friction (slip) clutch			
Skids	Height adjustable			
Finish	Powder coated			
Rotor diameter (mm)	375		434	
Rotor speed (rpm)	245		241	
No. of rotor flanges	4	6	8	9
No. of blades p/flange	6			
Total no. of blades	24	36	48	54
Blades	Curved/speed			
Linkage	Category 1 (quick hitch compatible)			
Guarding	Standard with CE guards			
Overall width (mm)	1035	1340	1775	1970
Working width (mm)	915	1220	1650	1830
Working depth (mm)	165		180	
Tractor range (HP)	15 - 28	20 - 35	30 - 50	35 - 50
Weight (kg)	153	180	285	310
Price				

Parts

14040	UL curved/speed blade (right)
14141	UL curved/speed blade (left)
14124	UL square/L shaped blade (right)
14125	UL square/L shaped blade (left)

Parts

4724	UM curved/speed blade (right)
4723	UM curved/speed blade (left)
4722	UM square/L shaped blade (right)
4721	UM square/L shaped blade (left)

UH/VH Series Rotary Hoe



The European designed COSMO UH Series Rotary Hoes are single speed, gear driven implements specifically for tractors 50 to 75HP. Engineered to include many features and accessories traditionally found in much larger rotary hoes, the COSMO UH Series is suitable for a range of horticultural and gardening applications including nurseries, vineyards and orchards. The rotor, with a diameter of 480mm blade to blade, features six (6) C shaped, heat treated blades (per flange) in a speed configuration. This design, where the blades are slightly staggered from flange to flange, reduces the tractor horsepower required to till a high volume of soil in a wide range of soil types and conditions.



The European designed COSMO VH Series Rotary Hoes have a multi speed gearbox that is rated 50 to 90HP. The main frame is a robust and rigid construction with box section reinforcing and the side gears are sealed via a gasket creating an oil bath. The COSMO VH Series produces a super fine finish. The spring loaded tailgate keeps soil inside and in contact with the blades until it is well pulverised. The multi speed gearbox allows the operator to customise the rotor speed. The rotor design, Ø 521mm from blade to blade, allows a large amount of soil to be worked without clogging up the chamber. The speed blade configuration, a design where six (6) L shaped blades (per flange) are slightly staggered, reduces the tractor horsepower required.

Code	TBUH60	TBUH72	TBUH84	TBVH80
Description	UH60 Rotary Hoe	UH72 Rotary Hoe	UH84 Rotary Hoe	VH80 Rotary Hoe
Side transmission	Gear drive			
Gearbox	75HP, 540rpm, single speed			90HP, 540rpm, multi speed (1000rpm option)
PTO shaft/clutch	Series 6 with 200mm (8") friction (slip) clutch			
Skids	Height adjustable			
Finish	Powder coated			
Rotor diameter (mm)	480			521
Rotor speed (rpm)	241			191 - 240 at 540rpm 248 at 1000rpm
No. of rotor flanges	7	8	9	8
No. of blades p/flange	6			
Total no. of blades	42	48	54	48
Blades	Curved/speed			Square/L shaped standard Curved/speed on request
Linkage	Category 1 and 2			Category 2
Guarding	Standard with CE guards			
Overall width (mm)	1834	2063	2292	2185
Working width (mm)	1680	1910	2140	2020
Working depth (mm)	190			225
Tractor range (HP)	50 - 75	55 - 75	60 - 75	70 - 90
Weight (kg)	390	420	450	665
Price				

Parts

- 3127** UH curved/speed blade (right)
- 3126** UH curved/speed blade (left)
- 3172** UH square/L shaped blade (right)
- 3173** UH square/L shaped blade (left)

Parts

- 3029** VH/UHH square/L shaped blade (right)
- 1374** VH/UHH square/L shaped blade (left)
- 23160** VH/UHH curved/speed blade (right)
- 23159** VH/UHH curved/speed blade (left)

VC-40 PTO Driven Woodchipper



VC-40	PTO Driven 4" chipper - manual feed	
--------------	-------------------------------------	--

A great lifestyle 4" chipper for small tractors 15-40HP.

- Valuechip 40 chips (4") 100mm branches
- 540 rpm PTO speed
- Weight: 195kg
- Manual feed only (no feed rollers)
- Shearbolt PTO driveshaft
- 360° swivel/adjustable discharge chute
- 1 year warranty

VC-60R PTO Driven Woodchipper



VC 60R	PTO Driven 6" chipper - hydraulic feed	
---------------	--	--

- Size 6" (150mm) branches
- Fitted with hydraulic-driven feed rollers for ease of loading/feeding foliage
- 540 rpm PTO speed
- 12" blades
- Safety cut-out bar
- A popular PTO-driven chipper for 50-80HP tractors
- Come with PTO driveshaft
- 360° swivel/adjustable discharge chute
- 1 year warranty

SBX Box Scrapers/Blade



SBX-4	(4') 1200mm Box Scraper c/w 4 shanks	
SBX-5	(5') 1500mm Box Scraper c/w 5 shanks	
SBX-6	(6') 1800mm Box Scraper c/w 6 shanks	
SBX-7	(7') 2100mm Box Scraper c/w 7 shanks	

Box blades are a lot more effective than just a standard scraper/grader blade as the 'boxed in' sides allow for better control and retention of the cut material.

Only in recent years are New Zealanders beginning to realise the advantages of these blades! Heavy duty box scrapers with removable and adjustable front scarifiers for levelling, finish grading and backfilling.

- Double cutting edges (front & back) for forward and reverse blading
- Cat 1 Linkage
- 1 year warranty

ATV Tow Flail Drum-Mulcher




AF120R	ATV Flail Mulcher (1.2m) rear opening tail gate version	
---------------	---	--

A handy 'all-rounder' to hitch to your ATV quad bike to tidy and mow rough areas, weeds, paddock mowing and driveways - and it can also mulch small prunings!


- This great little mulcher cuts 1.2mtrs wide
- A powerful 15HP electric start
- Easily adjustable for cutting between 25-70mm high
- 24 mulching spring steel hammer flails
- 1 year warranty

Grader Blades

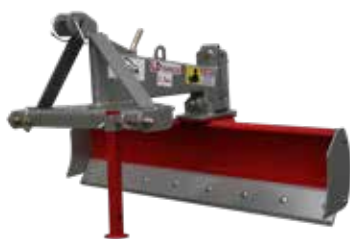

Code	KBLD120	KBLD150	KBLD180
Size reference	1.2m 4'0" 48"	1.5m 5'0" 60"	1.8m 6'0" 72"
Headstock	Tapered 5mm main beam		
Mouldboard	Reversible 6mm mouldboard		
Cutting edge	High Tensile road grade, reversible		
Linkage	Category 1, bolt-on pins		
Finish	Powder coated		
Adjustment	Angle, offset and tilt		
Controlled by	Pins and clips		
Blade angle	5 positions = square, 2 left, 2 right 15° & 18°		
Blade offset	7 positions = square, 3 left, 3 right 15° (200mm), 30° (400mm) & 45° (600mm)		
Blade Tilt	5 positions = square, 2 left, 2 right 15° & 18°		
Overall width (mm)	1200	1500	1800
Tractor range (HP)	15 - 35	22 - 35	25 - 35
Weight (kg)	135	145	155
Price			

Pasture Harrows

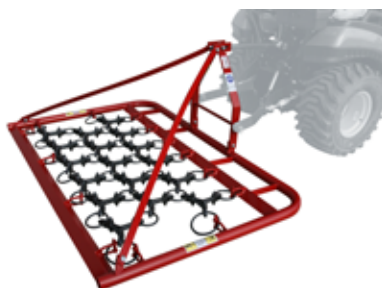

Code	KHPR200	KHPR400
Linkage/Tow Hitch	3pt Linkage/Cat 1	
Design	Tube frame with single piece cast net	
Harrow Material	Cast metal, three (3) prong star net	
Folds	Manual	Manual
Width (mm)	2000	4000
Folded Width (mm)	N/A	2000
Depth (mm)	1300	1800
Weight (kg)	150	245
Tractor Range (HP)	20-60	30-60
Price		

Land Plane



Code	KLP150	KLP210
Description	1.5m Land Plane	2.1m Land Plane
Construction	Fully welded, rigid (braced and gusseted), boxed tool bar	
Cutting edge	Two (2), 150x12, high tensile, reversible	
Linkage/Mounting	Double clevis, category 1	
Finish	Powder coated	
No. of tines	4	6
Working width (mm)	1520	2130
Overall width (mm)	1650	2300
Tractor range (HP)	20 - 40	35 - 75
Weight (kg)	233	293
Price		

TERMS & CONDITIONS

1. All prices and specifications are subject to renewal or alteration without prior notification.
2. Prices are in New Zealand Dollars and exclude GST.
3. It is the dealer's responsibility to check stock price and availability before quoting any model for resale.
4. Fieldmaster reserves the right to not sell any or all of the items in the price list to any potential purchaser or reseller.
5. Machines are freight paid nationwide to the nearest dealers yard. Delivery elsewhere will incur additional charges.

WARRANTY TERMS

All Fieldmaster machinery is covered by a comprehensive warranty against faulty materials and workmanship provided that: -

1. The machine is operated under normal conditions.
2. The machine is correctly serviced and maintained as per operators manual.
3. The machine is worked within its stated capacity (ie. horsepower limit and PTO speed).
4. The machine is not subjected to any non-approved modifications or damage from improper use Fieldmaster is in receipt of duly signed pre-delivery and installation certificate.
5. Failure due to operator error, negligence, improper use or lack of servicing in accordance with the operators manual is not covered by warranty.

The term of warranty shall be 12 or 24 months dependent on the specific machine from date of installation. Except machines sold into the Hire Industry which shall be void of warranty unless written approval given.

The following items are not covered by warranty;

1. Power take-off shafts and clutches.
2. Consumable items such as blades, tines, flails, knives, tyres, belts etc.
3. Freight costs.
4. Loss of income from the machine due to a warranty fault.
5. Use of non-genuine parts.
6. Operator error or misuse.

WARRANTY PROCEDURE

In the event of a product failure please phone your local Fieldmaster dealer immediately and discuss the problem with their customer services team.

HIRE MACHINE WARRANTY POLICY

Machines sold into the Hire Industry which shall be void of warranty unless written approval given, a limited 6 month warranty shall then apply.



FIELDMASTER

• PREMIUM FARM EQUIPMENT •

P: 07 850 1990

F: 07 850 1991

E: info@agattach.co.nz

PO Box 10232, Te Rapa, Hamilton 3241
34 Ingram Road, Rukuhia, Hamilton, New Zealand



FieldmasterNZ

www.fieldmaster.co.nz